Elektronische Bauelemente

2SC5706 D

NPN Silicon

General Purpose Transistor

RoHS Compliant Product

TO-252

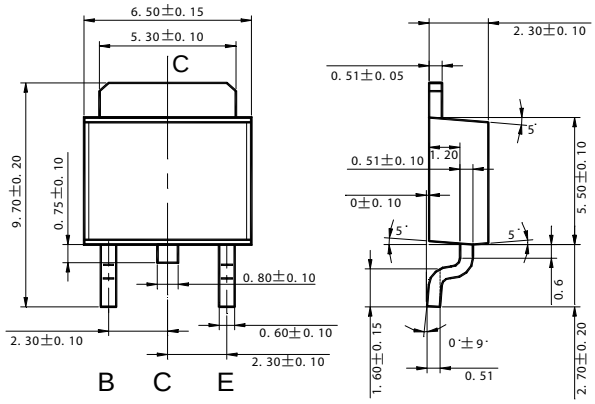

FEATURES

- Large current capacitance
- Low collector-to-emitter saturation voltage
- High-speed switching
- High allowable power dissipation

MARKING : 5706
(With Date Code)

MAXIMUM RATINGS* T_A=25℃unless otherwise noted

Parameter	Symbol	Ratings	Unit
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CES}	80	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_{CBO}	5	A
Collector Current (Pulse)	I_{CP}	7.5	A
Base Current	I_B	1.2	A
Junction Temperature	T_j	+150	°C
Storage Temperature	T_{STG}	-55~+150	°C
Total Power Dissipation	P_D	0.8	W
	P_D(TC=25°C)	15	W

ELECTRICAL CHARACTERISTICS (Tamb=25°Cunless otherwise specified)

Parameter	Symbol	Min	Typ.	Max	Unit.	Test Conditions
Collector-Base Breakdown Voltage	BV_{CBO}	80	-	-	V	I_C=10μA, I_E=0
Collector-Emitter Breakdown Voltage	BV_{CES}	80	-	-	V	I_C=100μA, R_{BE}=0
Collector-Emitter Breakdown Voltage	BV_{CEO}	50	-	-	V	I_C=1mA, R_{BE}=∞
Emitter-Base Breakdown Voltage	BV_{EBO}	6	-	-	V	I_E=10μA, I_C=0
Collector-Base Cutoff Current	I_{CBO}	-	-	1	μA	V_{CB}=40V, I_E=0
Emitter-Base Cutoff Current	I_{EBO}	-	-	1	μA	V_{EB}=4V, I_C=0
Collector Saturation Voltage 1	*V_{CE}(sat)1	-	-	135	mV	I_C=1A, I_B=50mA
Collector Saturation Voltage 2	*V_{CE}(sat)2	-	-	240	mV	I_C=2A, I_B=100mA
Base Saturation Voltage	*V_{BE}(sat)	-	-	1.2	V	I_C=2A, I_B=100mA
DC Current Gain	*h_{FE}	200	-	560		V_{CE}=2V, I_C=500mA
Gain-Bandwidth Product	fT	-	400	-	MHz	V_{CE}=10V, I_C=500mA
Output Capacitance	Cob	-	15	-	pF	V_{CB}=10V, f=1MHz
Turn-On Time	ton	-	35	-	ns	See specified test circuit.
Storage Time	tstg	-	300	-	ns	See specified test circuit.
Fall Time	tf	-	20	-	ns	See specified test circuit.

SwitchingTimeTest Circuit

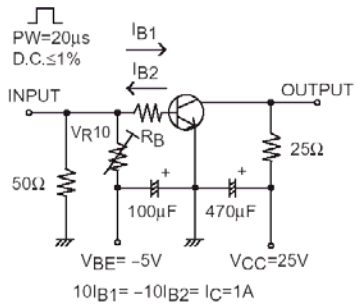

Characteristics Curve

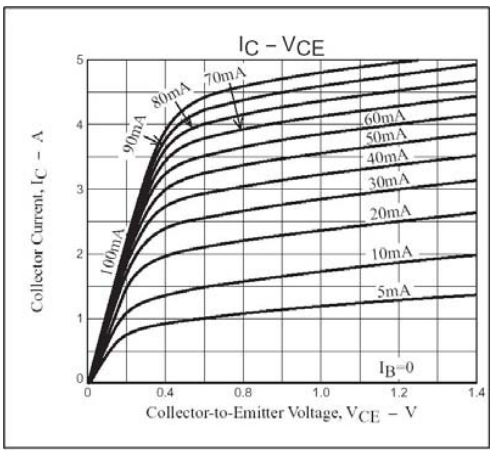

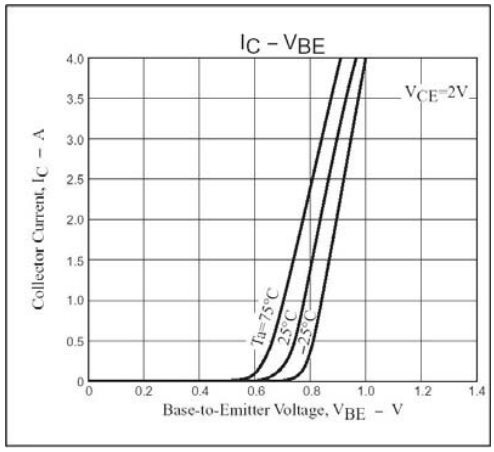

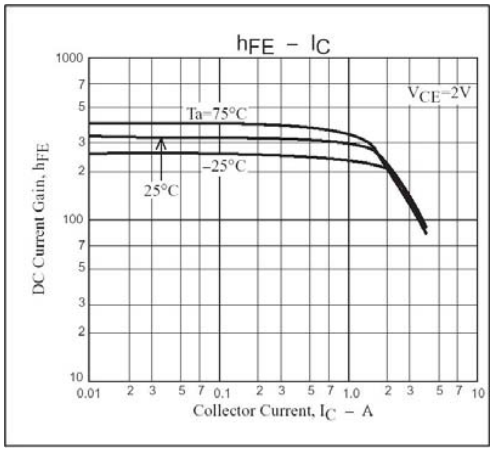

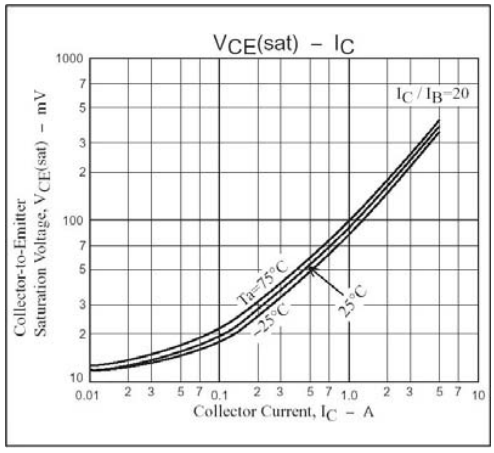

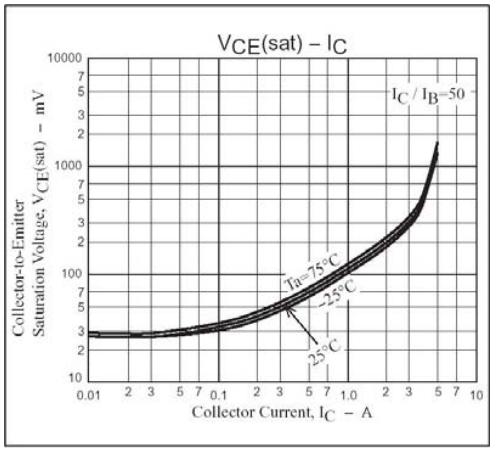

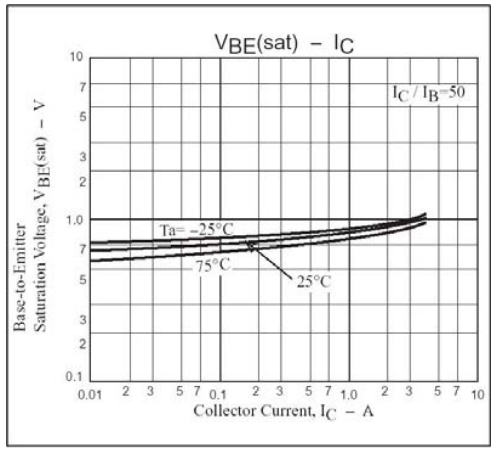

Elektronische Bauelemente

2SC5706D

NPN Silicon

General Purpose Transistor