

Silicon NPN Darlington Power Transistors

TIP140/141/142

DESCRIPTION

- With TO-3PN package
- DARLINGTON
- High DC current gain
- Complement to type TIP145/146/147

APPLICATIONS

- Designed for general-purpose amplifier and low frequency switching applications.

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

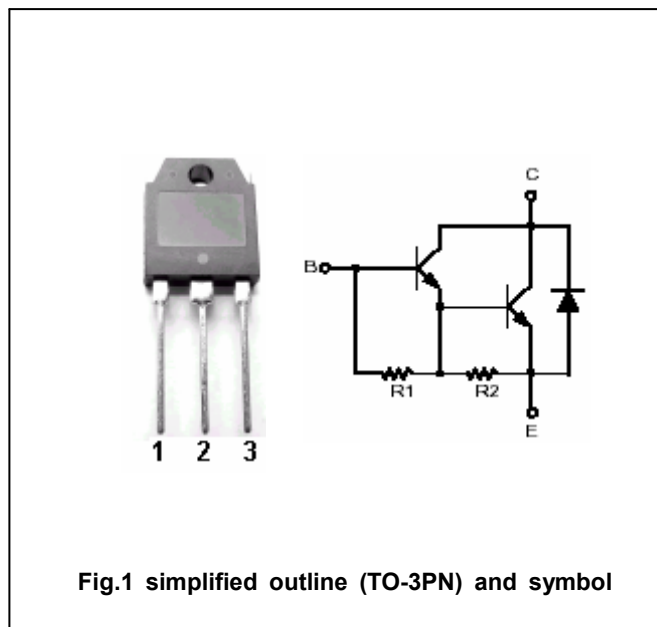


Fig.1 simplified outline (TO-3PN) and symbol

ABSOLUTE MAXIMUM RATINGS($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER		CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	TIP140	Open emitter	60	V
		TIP141		80	
		TIP142		100	
V_{CEO}	Collector-emitter voltage	TIP140	Open base	60	V
		TIP141		80	
		TIP142		100	
V_{EBO}	Emitter-base voltage		Open collector	5	V
I_C	Collector current-DC			10	A
I_{CM}	Collector current-Pulse			15	A
I_B	Base current-DC			0.5	A
P_C	Collector power dissipation		$T_c=25^\circ\text{C}$	125	W
T_j	Junction temperature			150	$^\circ\text{C}$
T_{stg}	Storage temperature			-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.0	$^\circ\text{C}/\text{W}$
$R_{th\ j-A}$	Thermal resistance case to ambient	35.7	$^\circ\text{C}/\text{W}$

Silicon NPN Darlington Power Transistors

TIP140/141/142

CHARACTERISTICS

T_J=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	TIP140	I _C =30mA, I _B =0	60			V
		TIP141		80			
		TIP142		100			
V _{CE(sat)-1}	Collector-emitter saturation voltage		I _C =5A, I _B =10mA			2.0	V
V _{CE(sat)-2}	Collector-emitter saturation voltage		I _C =10A, I _B =40mA			3.0	V
V _{BE(sat)}	Base-emitter saturation voltage		I _C =10A, I _B =40mA			3.5	V
V _{BE}	Base-emitter on voltage		I _C =10A ; V _{CE} =4V			3.0	V
I _{CBO}	Collector cut-off current	TIP140	V _{CB} =60V, I _E =0			1	mA
		TIP141	V _{CB} =80V, I _E =0				
		TIP142	V _{CB} =100V, I _E =0				
I _{CEO}	Collector cut-off current	TIP140	V _{CE} =30V, I _B =0			2	mA
		TIP141	V _{CE} =40V, I _B =0				
		TIP142	V _{CE} =50V, I _B =0				
I _{EBO}	Emitter cut-off current		V _{EB} =5V; I _C =0			2	mA
h _{FE-1}	DC current gain		I _C =5A ; V _{CE} =4V	1000			
h _{FE-2}	DC current gain		I _C =10A ; V _{CE} =4V	500			

Switching times

t _d	Delay time	V _{CC} = 30 V, I _C = 5.0 A, I _B = 20 mA; Duty Cycle ≤ 20% I _{B1} = I _{B2} , R _C & R _B Varied, T _J = 25°C		0.15		μs
t _r	Rise time			0.55		μs
t _{stg}	Storage time			2.5		μs
t _f	Fall time			2.5		μs

Silicon NPN Darlington Power Transistors

TIP140/141/142

PACKAGE OUTLINE

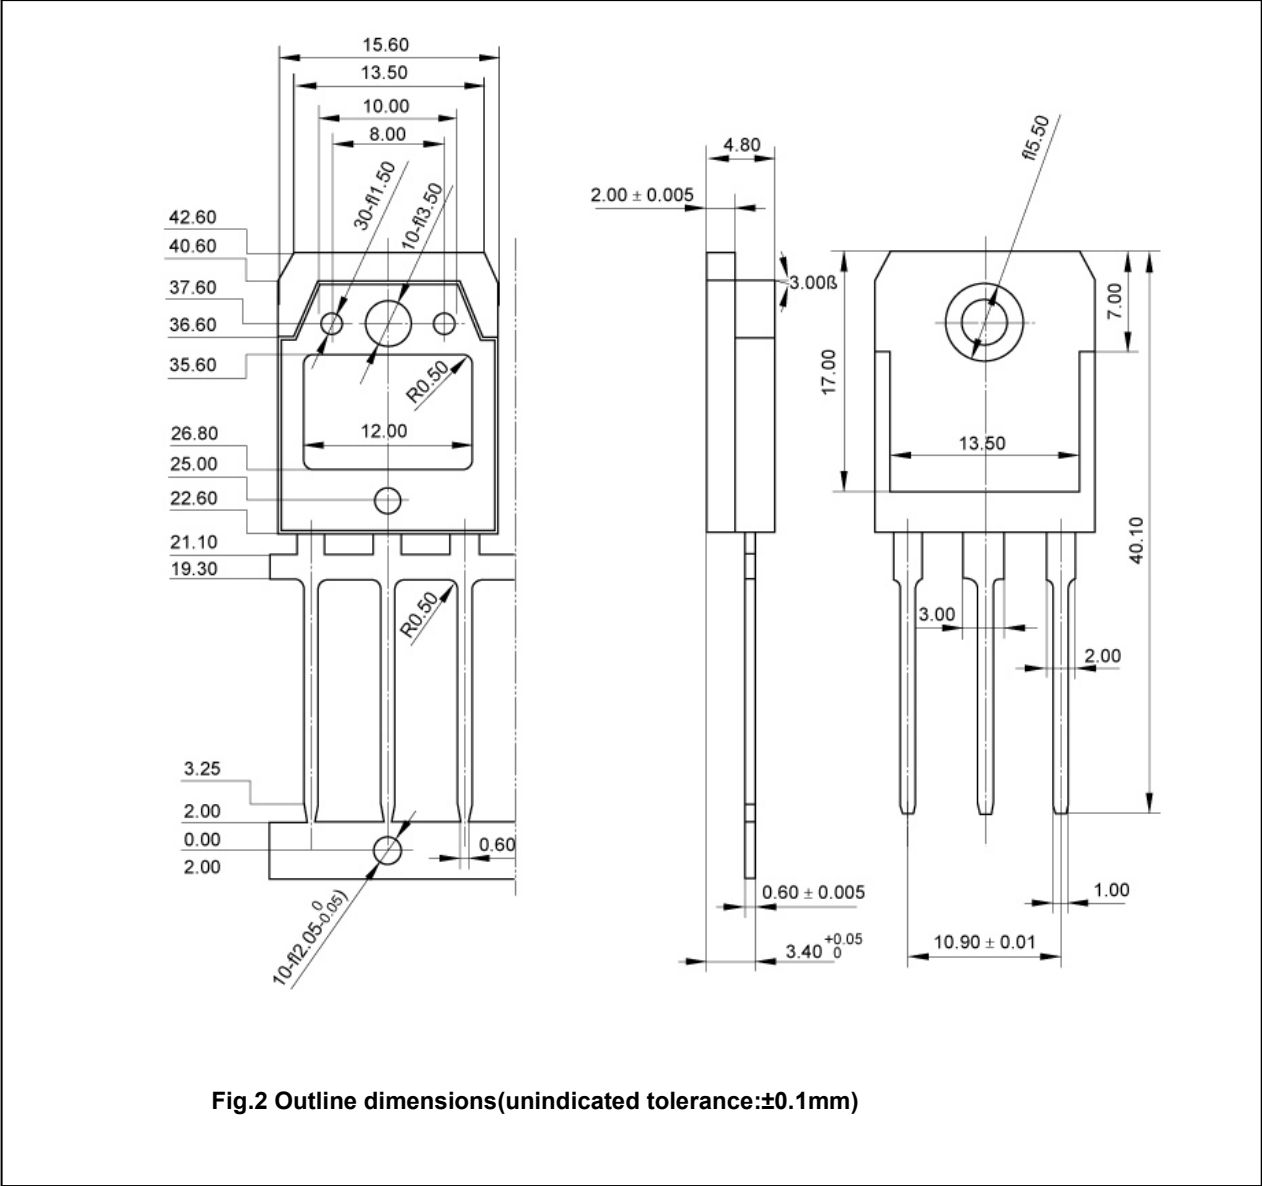


Fig.2 Outline dimensions(unindicated tolerance:±0.1mm)

Silicon NPN Darlington Power Transistors

TIP140/141/142

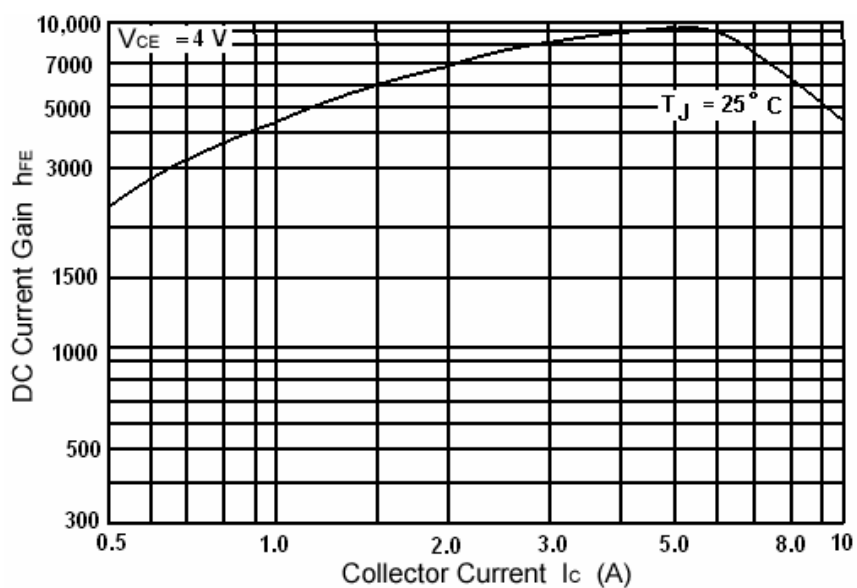


Fig.3 DC current Gain

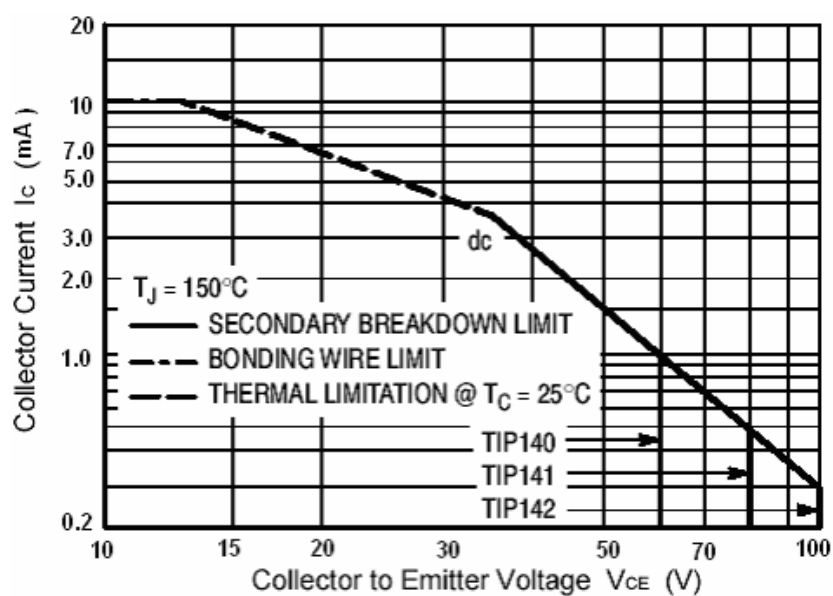


Fig.4 Safe Operating Area